



Chlorine Gas Module 0-5ppm

TB200B-EC4-Cl₂-5-01

Technical Specification

Liquid Electrochemical Gas Sensor

Anti-poisoning | Low cost | High precision | Fast response | Micropower

» Product Overview

The TB200B series chlorine gas module brings a lot of high-precision detection technology from Germany and the design concept of the German team together. The core sensor uses a liquid electrochemical sensor. This series of sensors has the advantages of long life, anti-poisoning, low power consumption, etc. It is a new generation of electrochemical gas sensors.

The module uses UART digital signal output, eliminating the customer's understanding of the sensor application and the tedious work of calibration.



» Features

- ☞ Sleep design, suitable for low power IOT applications
- ☞ Combined with intelligent algorithms, it has stronger adaptability to the environment, more accurate detection, and stable zero point
- ☞ The anti-toxicity is good
- ☞ New micro circuit design, strong anti-electromagnetic interference ability
- ☞ Fast response, fast return to zero, plug and play
- ☞ RoHS Eco-friendly design



» Application

- ☞ Leak detection
- ☞ TLV monitoring
- ☞ Semiconductor Industry
- ☞ Industrial safety monitoring
- ☞ Industrial exhaust emission monitoring
- ☞ Water treatment plant, swimming pool, chemical industry
- ☞ Environmental monitoring
- ☞ Portable and fixed-point applications



» Principle

Liquid electrochemical sensing technology is a revolutionary innovation in the field of electrochemical detection. Based on the principle of electrochemical catalytic reaction, this technology detects the output signals of the electrochemical reactions of different gases, and accurately measures the gas concentration through the signal amount.

The sensor is composed of three catalytic electrodes, liquid electrolyte and gas diffusion holes. The gas reaches the working electrode of the sensor through the diffusion holes, an electrochemical redox reaction occurs on the porous micro-surface of the electrode, the liquid electrolyte conducts electron transfer, and generate a current signal as an output. The current signal can characterize the gas concentration.

» Cross Sensitivity

Gas	Formula	Concentration (ppm)	Response(ppm)
Hydrogen fluoride	HF	3	0
Carbon monoxide	CO	100	0
Chlorine dioxide	ClO ₂	1	0.5
Hydrogen	H ₂	1000	0
Hydrogen sulfide	H ₂ S	10	0
Diborane	B ₂ H ₆	0.6	0.3
Hydrogen chloride	HCl	20	0
Ammonia	NH ₃	100	0
Fluorine	F ₂	1	0.4
Ozone	O ₃	0.25	0.05
Sulfur dioxide	SO ₂	5	1

Note: 1) The above interference factors may be different due to different sensors and service life, please refer to the actual test results.

2) This table is not complete for all gases, and the sensor may be sensitive to other gases.

» Order Informations


Product Name	Part Number	Range	Resolution
Chloride Gas Module	04-TB200B-EC4-Cl ₂ -5-01	0-5ppm	0.01ppm
4Pin Cable	02-MOD-CABLE-4PIN-01		

» Specification


Principle	Liquid electrochemical detection technology	
Detection of gas	Chloride gas	
Detection Range	0-5ppm; Resolution: 0.01ppm	
Lowest Detection Limit	0.05ppm	
Full-scale accuracy error	± 5% F.S	
Repeatability	≤2%	
Settling time	Store under clean air power on for the first time <60 seconds Note: Exposure to harsh chemicals, high concentrations of alcohol, acetone, and ethanol gas during storage may lead to extended warm-up time	
Response time	T50: <20 seconds; T90: <60 seconds	
Calibration Gas	5ppm measurement range: 3ppm Cl ₂ Chloride gas calibration; Note: The gas distribution standard uses clean air as the background gas, the humidity is 50%, and the normal temperature environment	
Sensor expected life time	2 years Note: Temperature (0-25) °C, humidity (30-70)% RH, the measured gas concentration is within the range, there is no gas environment that affects the warm-up time mentioned above	
Output	The standard output is: 3.3V UART digital signal (see below for communication protocol) ; Optional custom Modbus protocol Interface definition: VCC- Red, GND- Black, RX- Yellow, TX- Green; Baud rate: 9600 Data bits: 8 bits Stop bits: 1 bit	
Get data command	The communication is divided into active uploading and Q & A. The default is Q & A mode after power-on. You can use instructions to switch between the two modes. Return to Q & A mode after power off or switch power mode See next page for details	
Working Voltage	3.3-5.5V DC	
Working Current	< 5mA	
Power Consumption	25mW @ 5V DC	
Working temperature	(-40 - 55) °C	
Optimal working temperature	25°C	
Working humidity	(15-95) % RH. (Non-condensing)	
Optimum working humidity	50% RH.	
Working pressure	Atm ± 10%	
Circuit board size	40X30X5.6 (mm)	
Module size	40X30X22.45 (mm)	
Weight	< 25g	
Temperature and humidity sensor Data	Temperature Range: (-40 - 85) °C	Relative error: ± 0.2 °C
	Humidity measurement range: (10 - 95)% RH. non-condensing	Relative error: ± 2%
Warranty	12 months from the date of shipment	

» Structure Diagram (unit: mm)


TB200B-EC4-Cl₂-5-01 Dimension diagram

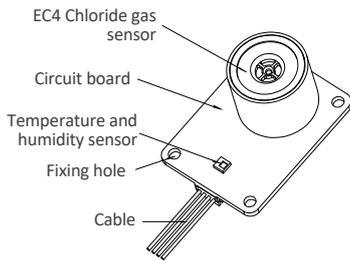

Product Schematic

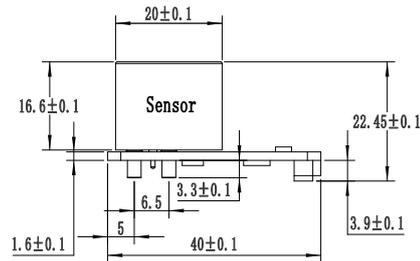


Side View

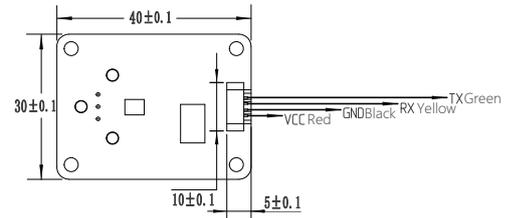


Bottom View

4Pin cable size diagram

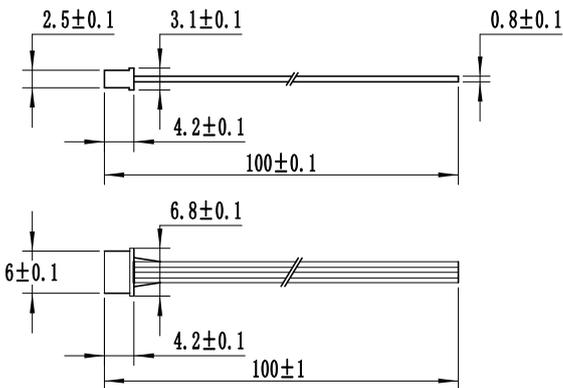


» Linearity

Temperature environment: 26 °C; Humidity environment: 55%; Air chamber space: 0.03m³; Ventilation flow of air distribution system: 4000sccm

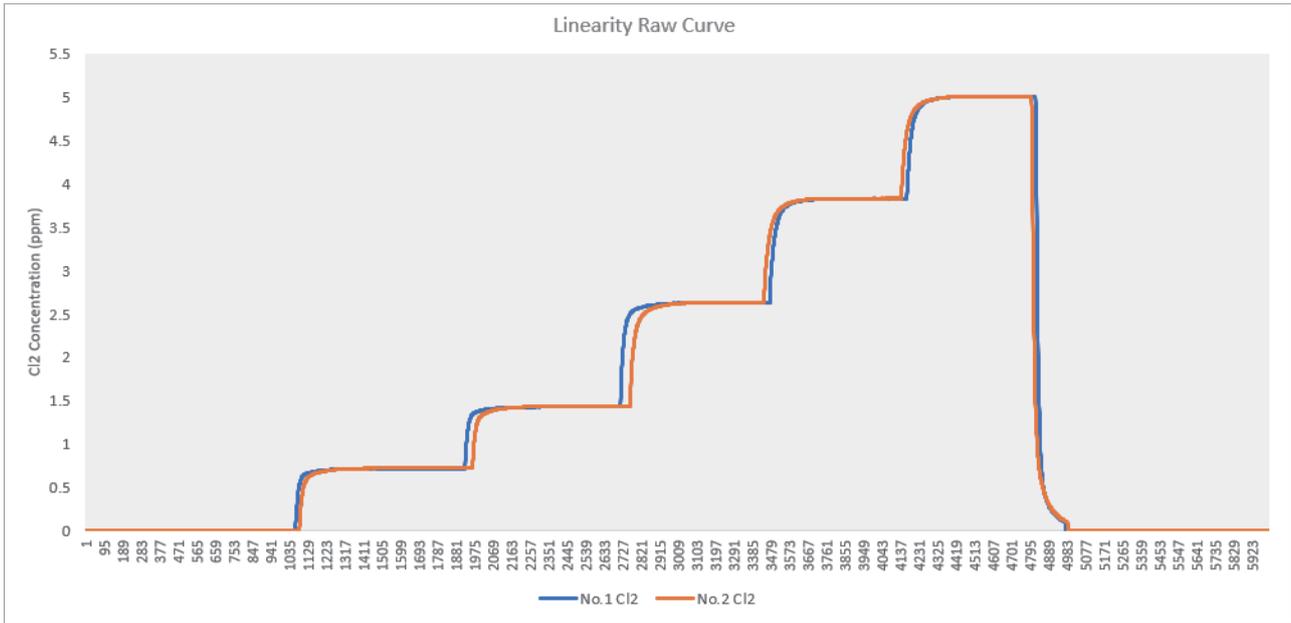


» Repeatability

Temperature environment: 26 °C; Humidity environment: 55%; Air chamber space: 0.03m³; Ventilation flow of air distribution system: 4000sccm

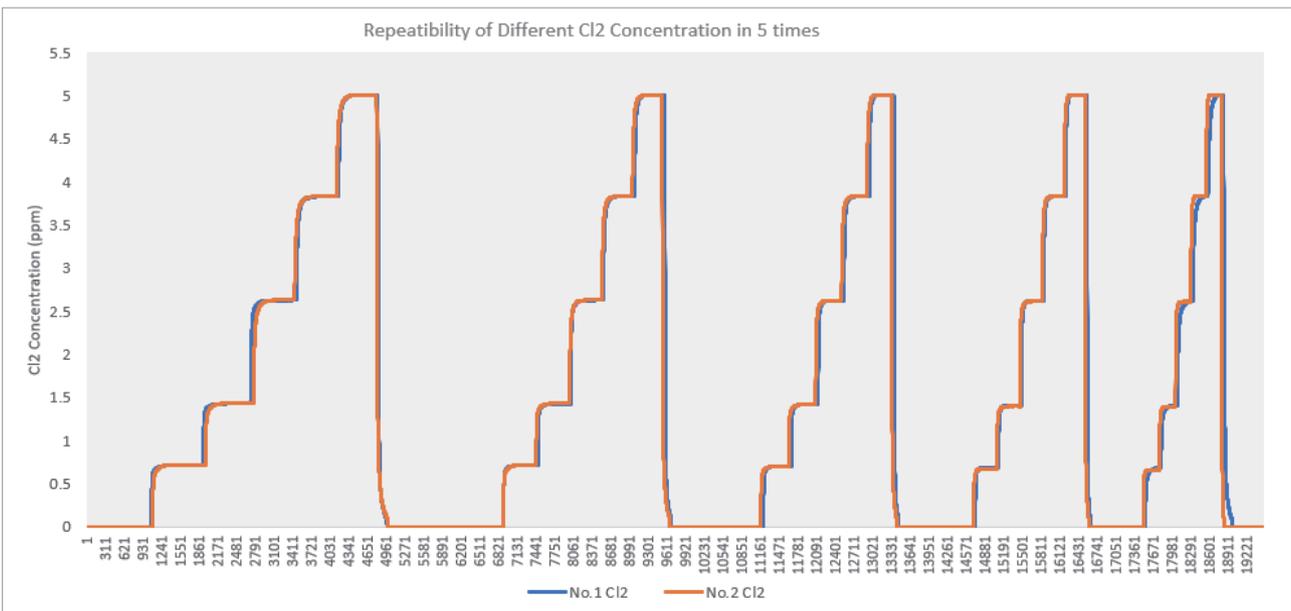

» Temperature

Temperature environment: -15, -5, 5, 15, 25, 35, 45, 55°C; air chamber space: 0.03m³; ventilation flow of gas distribution system: 4000scm

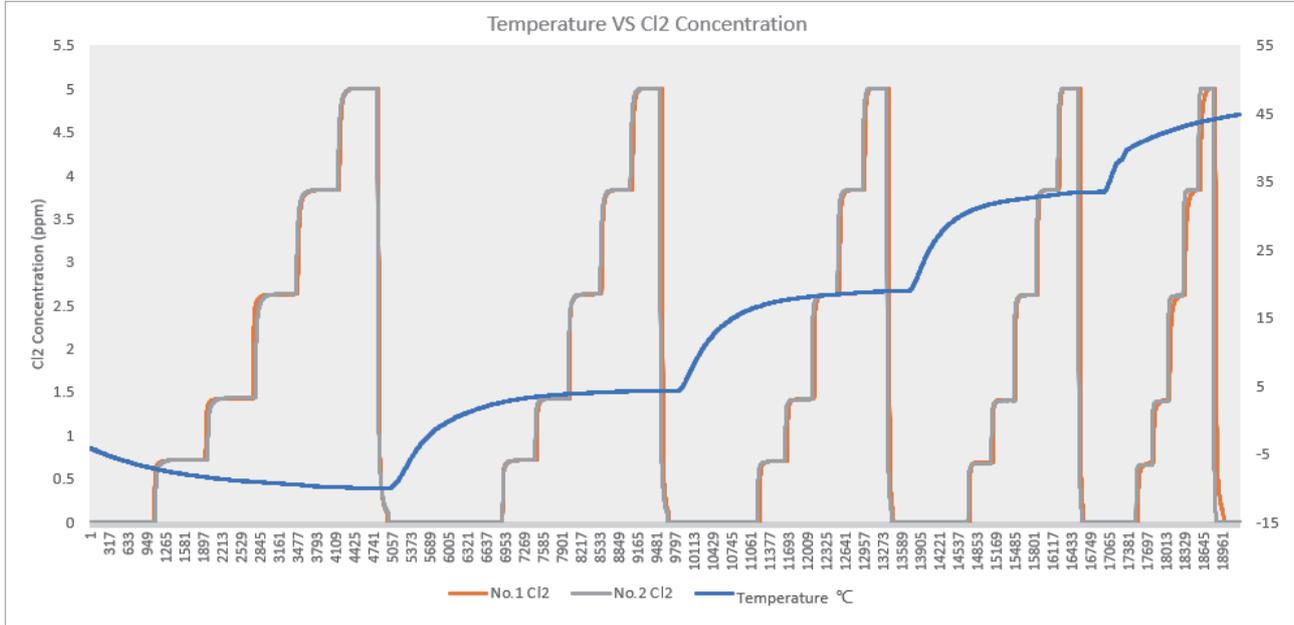

» User Guide

Thank you for choosing EC Sense liquid electricalchemical Gas module. Before using it, please read this document in detail in order to use our products correctly and effectively.

Storage

1. The best storage environment is: temperature (0-20) °C, relative humidity 50% RH (non-condensing);
2. The storage environment should keep the air clean, no pollution gas, no acetone, no high concentration organic gas, no dust, no smoke;
3. Avoid storage with alcohol (ethanol), perfume, sodium silicate and polyurethane liquids or solids;
4. Avoid high temperature and low humidity storage.

Packing and shipping

1. Avoid prolonged direct sunlight during transportation , prevent rainwater penetration;
2. Transport packaging should be protected with shock-proof bubble film or non-odor environmentally friendly sponge;
3. During long-distance transportation, the temperature inside the sensor package should be kept within 40 °C as much as possible, and the maximum temperature should not exceed 55 °C (can not be stored or used at this temperature for a long time), and the humidity should not be less than 15% RH;

Steps for usage

1. Warm-up

- The chloride gas detection module is designed to have a plug and play function, but due to the electrochemical nature of the chloride gas sensor, after receiving the calibrated product, it still takes about 60 seconds to warm up the first time the power is turned on. After the output signal is constant, the warm-up is complete.
(Note: under different storage and measurement environments, the first electrode stabilization time is different)
- When warming up, it is recommended to first warm the machine in clean air for about 1 minute, observe whether the output of the chloride gas detection module is 0ppm (due to storage and environmental differences, the indicated value <0.03ppm can be confirmed as normal), after confirming the chloride gas module normal, put it in the measured environment , let the sensor adapt to its environment, then you can get valid data.

2. Connection

- Please refer to the 4Pin cable in the "Structure Diagram" above. For the power supply, see the voltage and current ranges marked in the performance indicators. Note: incorrect wiring will cause the module to malfunction or damage the module.

3. Diffusion use

- When using in a closed environment, it is necessary to ensure a constant pressure and the working pressure range is within ± 10% of atmospheric pressure. to ensure accurate measurement data , when using under different pressure environments, re-sensitivity calibration should be performed according to the pressure of the use environment.
- Usually the change of pressure will cause the output signal to change.if The pressure increase, the signal will increase, the pressure change suddenly, and the sensor signal will have a sudden change in peak value.

4. Pump suction use

- When using the sensor in the pumping detection mode, the gas flow rate must be controlled within 500ml per minute, and the flow rate must be stable. The change of flow will cause the signal to fluctuate. When the flow is large, it will bring the change of pressure, which will cause the sensor signal value to change.
- When using the pump suction mode, it is best to add a flow sensor or an air pump control according to the product design to avoid negative pressure and physical damage to the sensor that cannot be recovered.
- The design of the gas path should avoid direct gas flow to the front of the sensor. An optional flow cap should be used, while the air is inlet and the air is outlet (normally small in and large out). The inlet and outlet gas is designed to be 90 degrees or straight-through with a barrier type to ensure that the gas can fully contact the chloride gas sensor.

» User Guide

5. Temperature and humidity effects

- The chloride gas module has been corrected for temperature compensation through an intelligent algorithm, which is suitable for the detection environment of -40 ~ 55 °C.
- The chloride gas sensor module must not be used and stored for a long time in a high-temperature and low-humidity environment with a humidity below 10% or a temperature above 55 °C. Failure to do so will result in reduced sensor life, either failure or test data is invalid.
- The frequent and rapid changes in temperature or humidity will affect the chemical material and cause an unexpected decrease in the sensor life.
- Chloride gas sensors are generally not affected by humidity, but during use, it is necessary to avoid condensation blocking the air inlet holes on the surface of the filter membrane, resulting in the inability of chloride gas to diffuse into the sensor and no signal output.
- The impact of environmental changes on the sensor: Due to the principle characteristics of the electrochemical sensor, the environmental changes have varying degrees of influence on the chemical electrolyte inside the sensor. The current data changes were analyzed in detail and combined with the temperature and humidity sensor data for algorithm compensation to correct the resulting deviation. Sudden changes in temperature and humidity will cause abnormal fluctuations in the trace data of the sensor, but generally it can fully adapt to the new environment and stabilize within 5-10 minutes. In addition, it is necessary to avoid condensate formed in the process of environmental changes blocking the air inlet hole on the surface of the filter membrane of the sensor, so that the measured gas cannot diffuse into the sensor and there is no signal output.

6. Maintain

- The maintenance of the chloride gas module is mainly for the calibration of accuracy. Usually, the liquid electrochemical chloride gas sensor does not consume chemical electrolyte, but due to the influence of temperature, humidity, dust, and other polluting gases in the use environment, it leads to the shifting of the sensitivity of the sensor. At this time, the chloride gas sensor needs to be re-sensitized and calibrated. The better the use environment, the longer the maintenance cycle will be, reducing maintenance workload;
- In case a calibration is needed the user may make sure that clean air is available or the module can be sent back to the factory for recalibration.

Precautions

1. The main function of the gas sensor is to detect the gas composition and content. Please make sure that the sensor is not getting in touch with any liquid;
2. Different gas sensors have different measurement concentration ranges (ranges), and should not be exposed to over-range/high concentrations for a longer time;
3. The sensor is covered with a waterproof and breathable filter (on the top of the sensor), which should not be damaged, scratched or pulled off;
4. Please make sure that the ventilation (filter) surface of the sensor is not blocked or contaminated. Blockage of the filter may lead to a reduced sensitivity, slow response time, or no response.
5. Please do not exchange the sensors of different gas detection modules, this will cause measurement errors, because all the parameters of each sensor and each circuit board are matched and calibrated, there will be deviations after the exchange;
6. Once the EC4 chloride gas sensor is unplugged and reinserted into the circuit board, please check that the three electrodes of EC4 correspond to the sockets on the circuit board to avoid irreversible damage to the sensor after reverse insertion;
7. Avoid excessive impact or vibration, such as the shell rupture, reveal the internal structure, the output will not guarantee the effectiveness.

» User Guide

Disclaimer

EC Sense Performance data stated is based on test conditions with new sensors at 26°C, 55%rH and 1 atm, flow rate 3000sccm using EC-Sense calibration Systems and AQS Testing System. Cross sensitivity gases are not target gases. Relations and performance can change, also with ageing of the sensor. In the interest of continued product improvement, EC-Sense reserves the right to change design features and specifications without prior notification. We do not accept any legal responsibility for customer applications of our sensors. EC-Sense accepts no liability for any consequential losses, injury or damage resulting from the use of this document, the information contained within or from any omissions or errors herein. This document does not constitute an offer for sale and the data contained is for guidance only and may not be taken as warranty. Any use of the given data must be assessed and determined by the user thereof to be in accordance with federal, state and local laws and regulations. All specifications outlined are subject to change without notice.

Warning

The EC-Sense sensor is designed to be used under various environmental conditions, but during storage, assembly and operation, due to the principle and characteristics of the liquid electrochemical sensor, in order to ensure normal use, users should strictly follow this article when using this module. And general-purpose PCB circuit board application methods, illegal applications will not be covered by the warranty. Although our products have high reliability, we recommend checking the module's response to the target gas before use to ensure on-site use. At the end of the product's service life, please do not discard any electronics in household waste. Please dispose it in accordance with local government regulations on electronic waste recycling.

» Communication Protocol

General settings

The sensor module uses serial communication. The communication configuration parameters are as follows:

Baud rate	9600
Data bits	8 bits
Stop bit	1 bit
Parity bit	None

Note: The communication is divided into active uploading and Q & A mode. The default mode is Q & A mode after power-on. You can use commands to switch between the two modes. After power-off or switching power consumption mode, the mode is restored.

Transmission mode switching instruction

Command 1 Instruction one switches to active upload. The command line format is as follows:

0	1	2	3	4	5	6	7	8
Start bit	Retain	Switch command	Automatic upload	Retain	Retain	Retain	Retain	Proof test value
0 x FF	0 x 01	0 x 78	0 x 40	0 x 00	0 x 00	0 x 00	0 x 00	0 x 47

Note: This format is fixed

Command 2 Switch to passive upload. The command line format is as follows:

0	1	2	3	4	5	6	7	8
Start bit	Retain	Switch command	Answer	Retain	Retain	Retain	Retain	Proof test value
0 x FF	0 x 01	0 x 78	0 x 41	0 x 00	0 x 00	0 x 00	0 x 00	0 x 46

Note: This format is fixed

Get module information instruction

Command 3 Gets sensor type, maximum range, unit, unit decimal places command: 0xD1
Returned value:

0	1	2	3	4	5	6	7	8
Sensor type	Maximum range high	Maximum range low	Unit	Retain	Retain	Retain	Number of decimal places (bit[4]~bit[7]) Data sign (bit[0]~bit[3])	Parity bit
0 x 1A	0 x 00	0 x CB	0 x 02	0 x 00	0 x 00	0 x 00	0 x 00	0 x 35

Note:

Max range = (Max range high << 8) | Max range low

Units: 0x02 (ppm and mg / m³) 0x04 (ppb and ug / m³)

Signs: 0 (positive number) 1 (negative number)

Decimal places: how many decimal places to read the concentration value, the maximum number of decimal places is 3

Sensor type

HCHO	VOC	CO	Cl ₂	H ₂	H ₂ S	HCl	HCN	HF	NH ₃	NO ₂	O ₂	O ₃	SO ₂
0 x 17	0 x 18	0 x 19	0 x 1A	0 x 1B	0 x 1C	0 x 1D	0 x 1E	0 x 1F	0 x C4	0 x 21	0 x 22	0 x 23	0 x 24

» Communication Protocol

Command 4 Get the sensor type, maximum range, unit, and decimal places command: 0xD7

0	1	2	3	4	5	6	7	8
Command header 1	Command header 2	Sensor type	Maximum range high	Maximum range low	Unit	Number of decimal places (bit[4]~bit[7]) Data sign (bit[0]~bit[3])	Retain	Parity bit
0 x FF	0 x D7	0 x 1A	0 x 00	0 x C8	0 x 02	0 x 01	0 x 00	0 x 44

Explanation:

Checksum: 1 ~ 7 bits of data are added to generate an 8-bit data, invert every bit and add 1 to the end

Decimal places bit [4] ~ bit [7]:

(bit[7]<<3) | (bit[6]<<2) | (bit[5]<<1) | bit[4] = decimal places

Data sign (bit[0]~bit[3]):

(bit[3]<<3) | (bit[2]<<2) | (bit[1]<<1) | bit[0] = 0 Negative inhibition

(bit[3]<<3) | (bit[2]<<2) | (bit[1]<<1) | bit[0] = 1 Positive inhibition

Unit :

0x02: unit is mg/m³ and ppm

0x04: unit is um/m³ and ppb

0x08: unit is 10g/m³ and %

Command 5 The format for actively reading the gas concentration value is as follows :

0	1	2	3	4	5	6	7	8
Start bit	Retain	Command	Retain	Retain	Retain	Retain	Retain	Parity bit
0 x FF	01	0 x 86	0 x 00	0 x 79				

Returned value:

0	1	2	3	4	5	6	7	8
Start bit	Command	High gas concentration (ug/m ³)	Low gas concentration (ug/m ³)	Full range high	Full range low	High gas concentration (ppb)	Low gas concentration (ppb)	Parity bit
0 x FF	0 x 86	0 x 00	0 x 2A	0 x 00	0 x 00	0 x 00	0 x 20	0 x 30

Description:

Checksum: 1 ~ 7-bit data is added to generate an 8-bit data, invert every bit and add 1 to the end

Gas concentration value = high gas concentration *256 + low gas concentration ;

(The high and low concentrations need to be converted from hexadecimal to decimal and then brought into this formula to calculate

» Communication Protocol

Command 6 Gas concentration value and temperature and humidity combined reading instruction

0	1	2	3	4	5	6	7	8
Start bit	Retain	Command	Retain	Retain	Retain	Retain	Retain	Parity bit
0 x FF	0 x 00	0 x 87	0 x 00	0 x 79				

Returned value:

0	1	2	3	4	5	6	7	8	9	10	11	12
Start bit	Command	High gas concentration (ug/m ³)	Low gas concentration (ug/m ³)	Full range high	Full range low	High gas concentration (ppb)	Low gas concentration (ppb)	Temperature high	Temperature low	Humidity high	Humidity low	Parity bit
0 x FF	0 x 87	0 x 00	0 x 2A	0 x 03	0 x E8	0 x 00	0 x 20	0 x 09	0 x C4	0 x 13	0 x 88	0 x DC

Description:

Checksum: 1 ~ 11 bits of data are added to generate an 8-bit data, each bit is inverted, and 1 is added at the end.

Gas concentration value = high gas concentration * 256 + low gas concentration;

(The high and low concentrations need to be converted from hex) adecimal to decimal and then brought into this formula to calculate

Temperature is signed data withTwo decimal places (°C-Celsius) Pseudo code calculation formula:

$$T = (\text{float})((\text{int})((0x0A < < 8)0x09))/100$$

Humidity is data without signs and two decimal places.The unit is (rh%). Pseudo code calculation formula:

$$Rh = (\text{float})((\text{uint})((0x0A < < 8)0x09))/100$$

Command 7 Get the current temperature and humidity

Returned value:

0	1	2	3
Temperature high 8 bit	Temperature low 8 bit	Humidity high 8 bit	Humidity low 8 bit
0 x 0A	0 x 09	0 x 11	0 x F4

Description:

Temperature is signed data with two decimal places and the unit is (°C-Celsius)

Pseudo code calculation formula:

$$T = (\text{float})((\text{int})((0x0A < < 8)0x09))/100$$

Humidity is data without sign and two decimal places, the unit is (rh%)

Pseudo code calculation formula:

$$Rh = (\text{float})((\text{uint})((0x0A < < 8)0x09))/100$$

» Communication Protocol

Command 8 Get the current temperature and humidity with calibration
Returned value:

0	1	2	3	4
Temperature high 8 bit	Temperature low 8 bit	Humidity high 8 bit	Humidity low 8 bit	Checksum
0 x 0A	0 x 09	0 x 11	0 x F4	0 x E8

Description:

Checksum: 0 ~ 3 digits of data are added to generate an 8-bit data. Each bit is inverted, plus 1 at the end

Temperature is data with a sign and two decimal places. The unit is (°C-Celsius)

Pseudo code calculation formula:

$$T = (\text{float})((\text{int})((0x0A < < 8) | 0x09)) / 100$$

Humidity is data with no sign and two decimal places in units (rh%).

Pseudo code calculation formula:

$$Rh = (\text{float})((\text{uint})((0x0A < < 8) | 0x09)) / 100$$

Command 9 Get the current version number
Returned value:

0	1	2	3	4	5
0 x 19	0 x 05	0 x 27	0 x 00	0 x 10	0 x 01

Data in active upload mode

The upload data format is as follows:

0	1	2	3	4	5	6	7	8
Start bit	Command	High gas concentration (ug/m ³)	Low gas concentration (ug/m ³)	Full range high	Full range low	High gas concentration (ppb)	Low gas concentration (ppb)	Parity bit
0 x FF	0 x 86	0 x 00	0 x 2A	0 x 00	0 x 00	0 x 00	0 x 20	0 x 30

Note:

Checksum: Add 1 to 11 digits of data to generate 8 digits of data, invert each bit, add 1 at the end

Gas concentration value = high gas concentration * 256 + low gas concentration

(The high and low concentrations need to be converted from hexadecimal to decimal and then brought into this formula to calculate)

Low power switching

Enter sleep mode

0	1	2	3	4	5
0 x AF	0 x 53	0 x 6C	0 x 65	0 x 65	0 x 70

Returned value :

0	1
0 x 4F	0 x 4B

» Communication Protocol

Exit sleep mode

0	1	2	3	4
0x AE	0x 45	0x 78	0x 69	0x 74

Returned value :

0	1
0x 4F	0x 4B

Note: after exiting sleep mode, it takes 5 seconds to recover, no data within 5 seconds

Enter sleep mode

0	1	2	3	4	5	6
0x A1	0x 53	0x 6C	0x 65	0x 65	0x 70	0x 32

Returned value :

0	1	2	3	4	5	6	7	8
0x FF	0x A1	0x 00	5F					

Exit sleep mode

0	1	2	3	4	5
0x A2	0x 45	0x 78	0x 69	0x 74	0x 32

Returned value :

0	1	2	3	4	5	6	7	8
0x FF	0x A2	0x 00	5E					

» Communication Protocol

Turn off the running lights

0	1	2	3	4	5	6	7	8
Start bit	Retain	Command	Retain	Retain	Retain	Retain	Retain	Checksum
0 x FF	0 x 01	0 x 88	0 x 00	0 x 77				

Return :

0	1
0 x 4F	0 x 4B

Turn on the running lights

0	1	2	3	4	5	6	7	8
Start bit	Retain	Command	Retain	Retain	Retain	Retain	Retain	Checksum
0 x FF	0 x 01	0 x 89	0 x 00	0 x 76				

Return :

0	1
0 x 4F	0 x 4B

Query the running light status

0	1	2	3	4	5	6	7	8
Start bit	Retain	Command	Retain	Retain	Retain	Retain	Retain	Checksum
0 x FF	0 x 01	0 x 8A	0 x 00	0 x 75				

Return :

0	1	2	3	4	5	6	7	8
Start bit	Command	State value	Retain	Retain	Retain	Retain	Retain	Checksum
0 x FF	0 x 8A	0 x 01	0 x 00	0 x 75				

Note: Status value 1 (light on), 0 (light off)

Business Centre
Europe and the rest of the world

EC Sense GmbH
Wolfratshausener Str.53,
82067 Ebenhausen, Germany
Tel: +49(0)8178 909 5130 Fax: +49(0) 8178 909 5131
Email: info@ecsense.com www.ecsense.com

Business Centre
Asia

Ning AQSystems Technology Co., Ltd.
F4-17 Building, Zhong Wu Technology Park No.228,
Jin Gu Bei Road, Ningbo District Ningbo,
Zhejiang Province, P.R. China Post Code: 315100
Tel: +86(0)574 88097236, 88096372
Email: info@aqsystems.cn www.ecsense.cn